




Cemented Carbide 6 Facet Anvil Blank

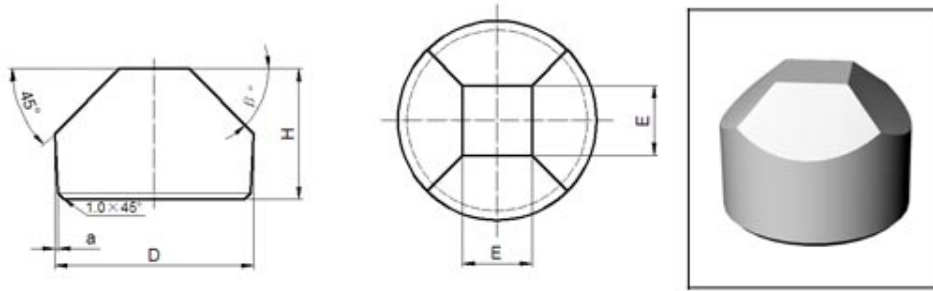

Unit: mm

Type	E	D	H	β°
CTC-GDC625	25.5	71.0	54.0	46
CTC-GDC628B	28.0	82.5	65.0	
CTC-GDC62	29.5		66.0	
CTC-GDC630-1	30.0	91.0	72.0	
CTC-GDC630-2		86.0	66.0	
CTC-GDC63110375	31.0	103.0	75.0	
CTC-GDC63110475		104.0		
CTC-GDC63110575		105.0		
CTC-GDC63110375	33.0	103.0		
CTC-GDC63110475		104.0		
CTC-GDC63110575		105.0		
CTC-GDC63110375	36.0	103.0		
CTC-GDC63110475		104.0		
CTC-GDC63110575		105.0		
CTC-GDC63710980	37.0	109.0	80.0	
CTC-GDC63711080		110.0		
CTC-GDC63710980	42.0	115.0	78.0	
CTC-GDC63711080		116.0		
CTC-GDC64210978	40.0	115.0	82.0	
CTC-GDC64211078		116.0		
CTC-GDC64211582		42.0		
CTC-GDC64211682	116.0			
CTC-GDC64211582	46.0			
CTC-GDC64211682		116.0		
CTC-GDC64412793	44.0	127.0	93.0	
CTC-GDC64412893		128.0		
CTC-GDC64412993		129.0		
CTC-GDC64512793	45.0	127.0		
CTC-GDC64512893		128.0		
CTC-GDC64512993		129.0		
CTC-GDC64612793	46.0	127.0		



Continued

Unit: mm

Type	E	D	H	β°
CTC-GDC64612893	46.0	128.0	93.0	46
CTC-GDC64612993		129.0		
CTC-GDC64712793	47.0	127.0		
CTC-GDC64712893		128.0		
CTC-GDC64722993		129.0		
CTC-GDC65113092	51.0	130.0	92.0	
CTC-GDC64113192		131.0		

Tolerance: a、D、H: +0.80; α : 1°