




Cemented Carbide Coal Mining Tool-Type M10

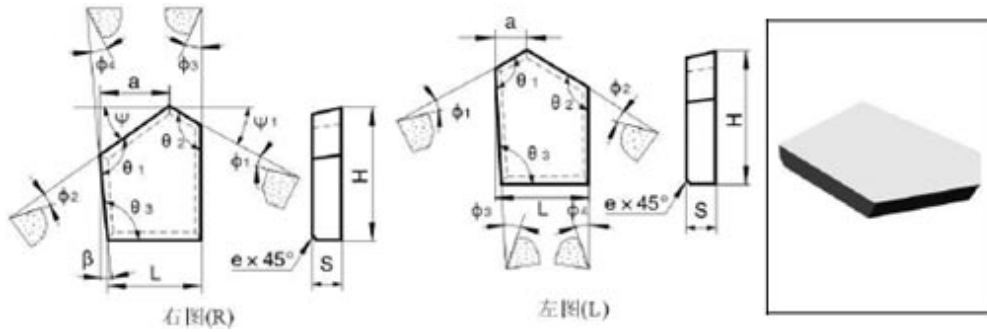

Unit: mm

Type	L	H	S	a	θ_1	θ_2	θ_3
CTC-GM1011L	11.0	13.5	3.0	4.5	122°	114°46'	93°
CTC-GM1012R	12.0	14.0	3.5	4.0	120°	117°	93°
CTC-GM1013R	13.5	13.5	3.0	6.0	116°34'	108°48'	93°
CTC-GM1015R	15.0	22.0	3.0	5.0	125°	117°	93°
CTC-GM105L	15.0	22.0	3.0	5.0	122°	120°	93°
CTC-GM105RA	15.0	19.0	3.0	5.0	125°	117°	93°
CTC-GM1015LA	15.0	19.0	3.0	5.0	122°	120°	93°
CTC-GM1016R	16.2	23.8	3.1	4.0	120°	119°	91°
CTC-GM1016L	16.2	23.8	3.1	4.0	119°	120°	91°
CTC-GM1016RA	16.0	23.0	3.0	6.0	123°	121°	92°
CTC-GM1016LA	16.0	23.0	3.0	6.0	121°	123°	92°

Tolerance: ± 1.0