




Cemented Carbide Drawing Dies Type 12

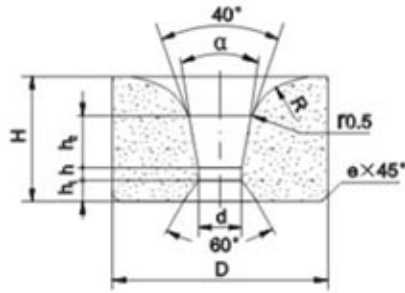

Unit: mm

Type	D	H	d	h	h1	h2	R	a	e
CTC-G12-0080610-0.4	8	6	0.4	0.3	1	1.4			
CTC-G12-0080610-0.6			0.6	0.4		1.6			
CTC-G12-0080610-0.8			0.8	0.6		1.8			
CTC-G12-0130810-0.4	13	8	0.4	0.3	1.5	2.0	2.0	10°	0.5
CTC-G12-0130810-0.6			0.6	0.5					
CTC-G12-0130810-0.8			0.8						
CTC-G12-0130810-1.0			1.0	0.6		2.5			
CTC-G12-0130810-1.3			1.3	0.8					
CTC-G12-0130810-1.8			1.8			3.0			
CTC-G12-0130810-2.3	2.3	1.0							
CTC-G12-0161012-0.8	16	10	0.8	0.5	2.0	2.5		12°	
CTC-G12-0161012-1.0			1.0	0.6					
CTC-G12-0161012-1.3			1.3						
CTC-G12-0161012-1.8			1.8	1.0					
CTC-G12-0161012-2.3			2.3			3.5			
CTC-G12-0161012-2.8			2.8	1.2					
CTC-G12-0201214-2.3	20	12	2.3	1	2.5	4.5	3.0	14°	1.0
CTC-G12-0201214-2.8			2.8	1.2		5.0			
CTC-G12-0201214-3.3			3.3	1.4					
CTC-G12-0201214-3.8			3.8						
CTC-G12-0221416-4.2	22	14	4.2	1.6	3.0	5.5		16°	
CTC-G12-0221416-4.7			4.7			7.0			
CTC-G12-0221416-5.2			5.2	2.0					
CTC-G12-0221416-5.7			5.7						
CTC-G12-0261616-6.4	26	16	6.4	2.0	3.5	7.5	3.5		
CTC-G12-0261616-7.2			7.2						
CTC-G12-0261616-8.0			8.0						

Tolerance: refer to Q/ZYH106-2000