




### Cemented Carbide Milling Insert-Type 40

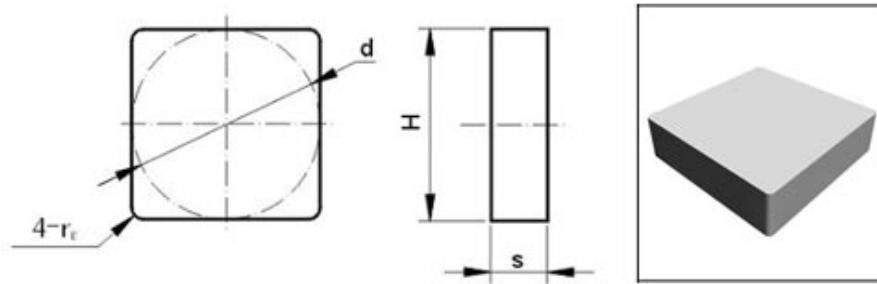

Unit: mm

Type	d	s	re	H
CTC-G410050	10.5	3.5	0.5	10.5
CTC-G4100501	10.5	3.8	0.5	10.5
CTC-G413050	13.5	4.8	0.5	13.5
CTC-G416050	16.5	4.8	0.5	16.5
CTC-G416150	16.5	4.8	0.5	16.5
CTC-G419100	19.6	5.8	1.0	19.6
CTC-G420100	20.3	7.0	1.0	20.3

Tolerance: d:  $\pm 0.20$ ; s、H:  $\pm 0.25$