




### Cemented Carbide Milling Insert-Type 48

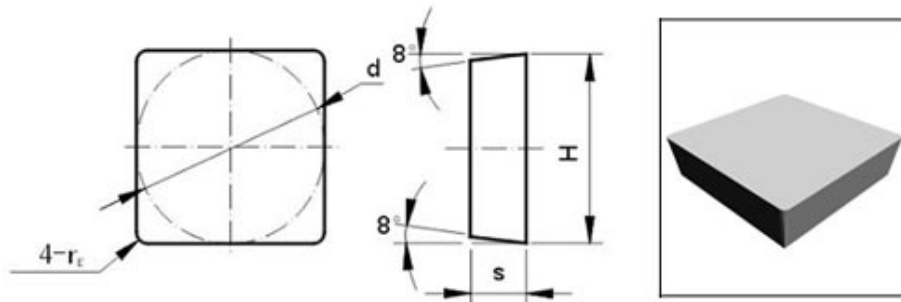

Unit: mm

Type	d	S	re	H
CTC-G410058	10.5	3.5	0.5	10.5
CTC-G413108-1	13.5	3.9	1.0	13.5
CTC-G413108	13.5	4.8	1.0	13.5
CTC-G416108	16.5	4.8	1.0	16.5
CTC-G419108	19.6	5.8	1.0	19.6
CTC-G420108	20.6	7.3	1.0	20.6

Tolerance: d:  $\pm 0.20$ ; s、H:  $\pm 0.25$