




### Cemented Carbide Rods with One Straight Coolant Hole

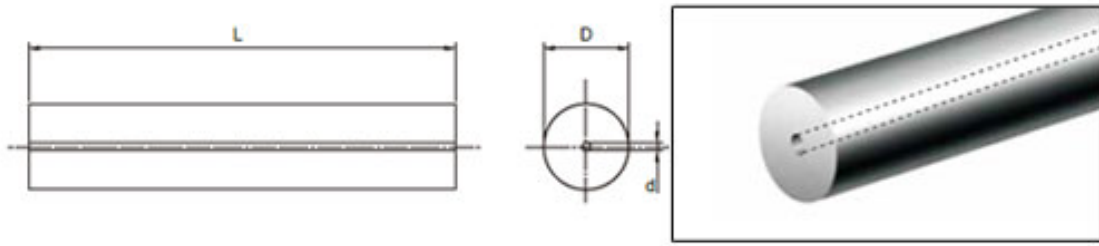

Unit: mm

Type	D	d	L	Concentricity
CTC-BΦ4.0×Φ1.0×330	4	1.0	330	≤0.20
CTC-BΦ5.0×Φ1.0×330	5	1.0	330	≤0.20
CTC-BΦ5.0×Φ1.5×330	5	1.5	330	≤0.20
CTC-BΦ6.0×Φ1.0×330	6	1.0	330	≤0.20
CTC-BΦ6.0×Φ1.5×330	6	1.5	330	≤0.20
CTC-BΦ8.0×Φ1.0×330	6	1.0	330	≤0.25
CTC-BΦ8.0×Φ1.5×330	6	1.5	330	≤0.25
CTC-BΦ9.0×Φ1.0×330	9	1.0	330	≤0.25
CTC-BΦ10.0×Φ1.0×330	10	1.0	330	≤0.25
CTC-BΦ10.0×Φ2.0×330	10	2.0	330	≤0.25
CTC-BΦ11.0×Φ1.0×330	11	1.0	330	≤0.25
CTC-BΦ12.0×Φ1.0×330	12	1.0	330	≤0.25
CTC-BΦ12.0×Φ2.0×330	12	2.0	330	≤0.25
CTC-BΦ14.0×Φ2.0×330	14	2.0	330	≤0.25
CTC-BΦ16.0×Φ2.0×330	16	2.0	330	≤0.25
CTC-BΦ16.0×Φ3.0×330	16	3.0	330	≤0.25

Tolerance: D: +0.2~+0.8; d: ±0.2; L: 0~+5