




### Cemented Carbide Solid Rods

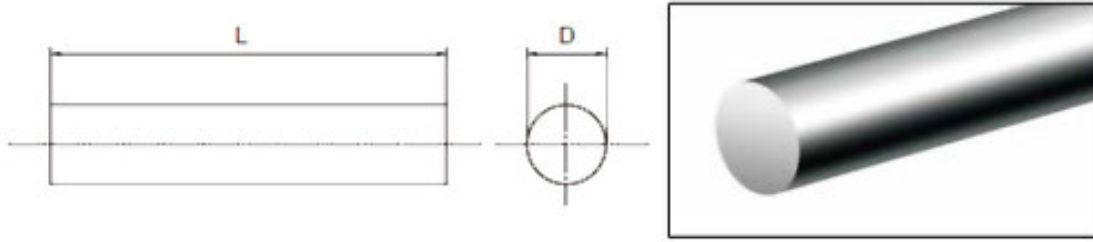

Unit: mm

Type	D	L
CTC-BΦ0.5×100	0.5	100
CTC-BΦ1.0×330	1.0	330
CTC-BΦ2.0×330	2.0	330
CTC-BΦ3.0×330	3.0	330
CTC-BΦ4.0×330	4.0	330
CTC-BΦ5.0×330	5.0	330
CTC-BΦ6.0×330	6.0	330
CTC-BΦ7.0×330	7.0	330
CTC-BΦ8.0×330	8.0	330
CTC-BΦ9.0×330	9.0	330
CTC-BΦ10.0×330	10.0	330
CTC-BΦ11.0×330	11.0	330
CTC-BΦ12.0×330	12.0	330
CTC-BΦ13.0×330	13.0	330
CTC-BΦ14.0×330	14.0	330
CTC-BΦ15.0×330	15.0	330
CTC-BΦ16.0×330	16.0	330
CTC-BΦ17.0×330	17.0	330
CTC-BΦ18.0×330	18.0	330
CTC-BΦ18.0×330	19.0	330
CTC-BΦ20.0×330	20.0	330
CTC-BΦ21.0×330	21.0	330
CTC-BΦ22.0×330	22.0	330
CTC-BΦ23.0×330	23.0	330
CTC-BΦ24.0×330	24.0	330
CTC-BΦ25.0×330	25.0	330
CTC-BΦ26.0×330	26.0	330
CTC-BΦ27.0×330	27.0	330



Continued

Unit: mm

Type	D	L
CTC-BΦ28.0×330	28.0	330
CTC-BΦ29.0×330	29.0	330
CTC-BΦ30.0×330	30.0	330
CTC-BΦ31.0×330	31.0	330
CTC-BΦ32.0×330	32.0	330
CTC-BΦ33.0×330	33.0	330
CTC-BΦ34.0×330	34.0	330
CTC-BΦ35.0×330	35.0	330

Tolerance: D: +0.2~+0.9