




### Cemented Carbide Standard Plates

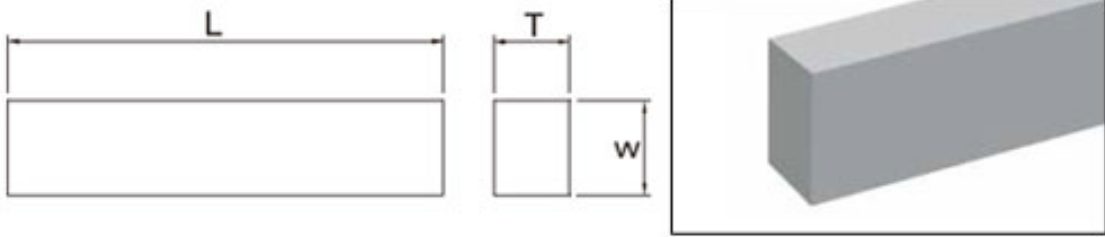

Unit: mm

Type	L	W	T
CTC-GL×3.0×2.0	≤330	3	2.0
CTC-GL×4.0×3.0		4	3.0
CTC-GL×5.0×2.0		5	2.0
CTC-GL×5.0×3.5			3.5
CTC-GL×5.5×1.0		5.5	1.0
CTC-GL×6.0×3.0		6	3.0
CTC-GL×8.0×2.0		8	2.0
CTC-GL×8.0×3.0			3.0
CTC-GL×10×2.0		10	2.0
CTC-GL×10×2.5			2.5
CTC-GL×10×3.0			3.0
CTC-GL×10×3.5			3.5
CTC-GL×12×2.0		12	2.0
CTC-GL×12×2.5			2.5
CTC-GL×12×3.0			3.0
CTC-GL×12×3.5			3.5
CTC-GL×12×4.5			4.5
CTC-GL×12×5.0		14	5.0
CTC-GL×14×3.0			3.0
CTC-GL×15×2.0		15	2.0
CTC-GL×15×3.5			3.5
CTC-GL×15×4.0			4.0
CTC-GL×16×3.0		16	3.0
CTC-GL×17×3.0		17	3.0
CTC-GL×17×5.0			5.0
CTC-GL×18×2.0		18	2.0
CTC-GL×18×3.5			3.5
CTC-GL×20×2.0		20	2.0
CTC-GL×20×3.0			3.0
CTC-GL×20×3.5			3.5
CTC-GL×20×5.0			5.0



Continued

Unit: mm

Type	L	W	T
CTC-GL×22×3.5	≤330	22	3.5
CTC-GL×22×4.0			4.0
CTC-GL×25×3.5		25	3.5
CTC-GL×25×4.0			4.0
CTC-GL×30×5.0		30	5.0
CTC-GL×32×3.0		32	3.0
CTC-GL×34×4.0		34	4.0

Tolerance: W、T: +0.30~+1.40; L: -0.0~+3.50, straightness of L ≤0.30~0.65