




Cemented Carbide Standard Plates

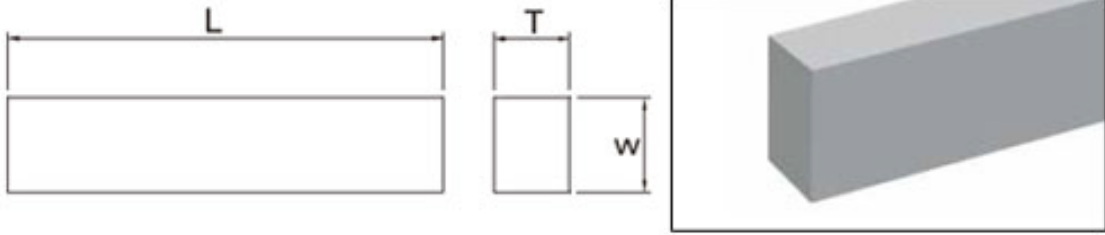

Unit: mm

| Type | L | W | T |
|------------------|-----|-----|------|
| CTC-X100×100×5.0 | 100 | 100 | 5.0 |
| CTC-X100×100×5.5 | 100 | 100 | 5.5 |
| CTC-X100×100×6.0 | 100 | 100 | 6.0 |
| CTC-X100×100×6.5 | 100 | 100 | 6.5 |
| CTC-X100×100×7.0 | 100 | 100 | 7.0 |
| CTC-X100×100×7.5 | 100 | 100 | 7.5 |
| CTC-X100×100×8.0 | 100 | 100 | 8.0 |
| CTC-X100×100×8.5 | 100 | 100 | 8.5 |
| CTC-X100×100×9.0 | 100 | 100 | 9.0 |
| CTC-X100×100×9.5 | 100 | 100 | 9.5 |
| CTC-X100×100×10 | 100 | 100 | 10.0 |
| CTC-X100×100×11 | 100 | 100 | 11.0 |
| CTC-X100×100×12 | 100 | 100 | 12.0 |
| CTC-X100×100×13 | 100 | 100 | 13.0 |
| CTC-X100×100×14 | 100 | 100 | 14.0 |
| CTC-X100×100×15 | 100 | 100 | 15.0 |
| CTC-X100×100×16 | 100 | 100 | 16.0 |
| CTC-X100×100×17 | 100 | 100 | 17.0 |
| CTC-X100×100×18 | 100 | 100 | 18.0 |
| CTC-X100×100×19 | 100 | 100 | 19.0 |
| CTC-X100×100×20 | 100 | 100 | 20.0 |
| CTC-X100×100×22 | 100 | 100 | 22.0 |
| CTC-X100×100×24 | 100 | 100 | 24.0 |
| CTC-X100×100×26 | 100 | 100 | 26.0 |
| CTC-X100×100×28 | 100 | 100 | 28.0 |
| CTC-X100×100×30 | 100 | 100 | 30.0 |
| CTC-X100×100×32 | 100 | 100 | 32.0 |
| CTC-X100×100×34 | 100 | 100 | 34.0 |
| CTC-X100×100×36 | 100 | 100 | 36.0 |
| CTC-X100×100×38 | 100 | 100 | 38.0 |



Continued

Unit: mm

| Type | L | W | T |
|-----------------|-----|-----|------|
| CTC-X100×100×40 | 100 | 100 | 40.0 |
| CTC-X100×100×45 | 100 | 100 | 45.0 |
| CTC-X100×100×50 | 100 | 100 | 50.0 |
| CTC-X100×100×55 | 100 | 100 | 55.0 |
| CTC-X100×100×60 | 100 | 100 | 60.0 |
| CTC-X100×100×70 | 100 | 100 | 70.0 |
| CTC-X100×100×80 | 100 | 100 | 80.0 |

Tolerance: Blank: L、W: ± 2.2 ; T: ± 1.5

Finished: ± 0.01