




Cemented Carbide Rods with Three Helical Coolant Holes(30°)

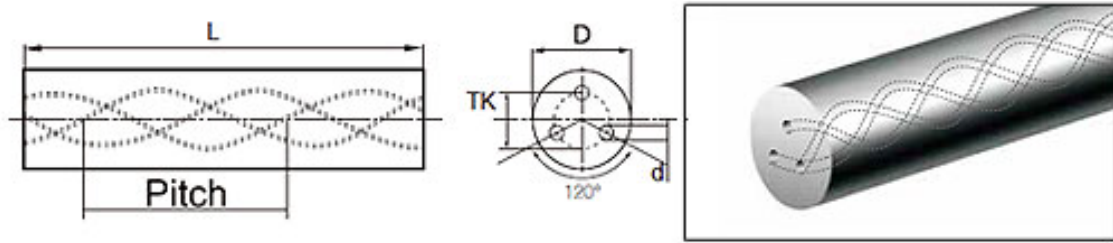

Unit: mm

Type	D	TK	d	L	Pitch
CTC-CΦ6.3×3Φ0.7×2.3×330	6.3	2.3	0.70	330	32.65
CTC-CΦ6.3×3Φ0.6×3.0×330	6.3	3.0	0.60	330	32.65
CTC-CΦ8.3×3Φ0.75×4.0×330	8.3	4.0	0.75	330	43.53
CTC-CΦ10.3×3Φ1.0×4.9×330	10.3	4.9	1.00	330	54.41
CTC-CΦ12.3×3Φ1.1×6.0×330	12.3	6.0	1.10	330	65.3
CTC-CΦ14.5×3Φ1.3×7.1×330	14.5	7.1	1.30	330	76.18
CTC-CΦ16.3×3Φ1.5×8.3×330	16.3	8.3	1.50	330	87.06
CTC-CΦ18.3×3Φ1.7×9.7×330	18.3	9.7	1.70	330	97.95
CTC-CΦ20.3×3Φ2.0×10.4×330	20.3	10.4	2.00	330	108.83

Tolerance: D: +0.4~+1.4; TK: 0.2~0.5; d: 0.15~0.25; L: +1.5