




Cemented Carbide Turning Insert-Type 4A

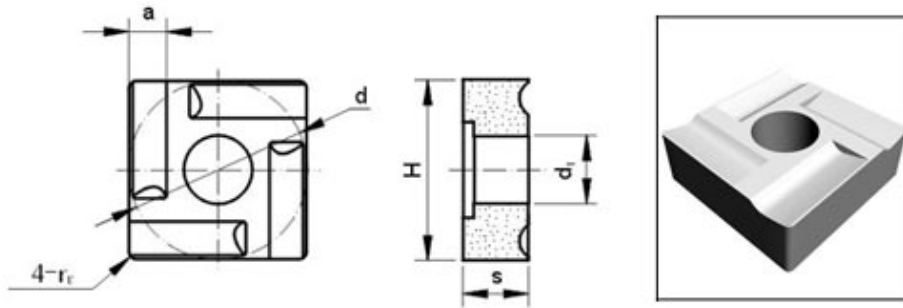

Unit: mm

Type	d	s	re	H	a \approx	d1
CTC-G41005A	10.0	3.5	0.5	10.0	2.4	4.2
CTC-G41305A	13.0	4.5	0.5	13.0	3.4	5.2
CTC-G41315A	13.0	4.5	1.5	13.0	3.4	5.2
CTC-G41605A	16.0	5.5	0.5	16.0	4.4	6.2
CTC-G41625A	16.0	5.5	2.5	16.0	4.4	6.2
CTC-G41905A	19.0	7.0	0.5	19.0	5.4	7.2
CTC-G41910A	19.0	7.0	0.5	19.0	5.4	7.2
CTC-G41005AL	10.0	3.5	0.5	10.0	2.4	4.2
CTC-G41305AL	13.0	4.5	0.5	13.0	3.4	5.2
CTC-G41315AL	13.0	4.5	1.5	13.0	3.4	5.2
CTC-G41605AL	16.0	5.5	0.5	16.0	4.4	6.2
CTC-G41625AL	16.0	5.5	2.5	16.0	4.4	6.2
CTC-G41905AL	19.0	7.0	0.5	19.0	5.4	7.2
CTC-G41910AL	19.0	7.0	0.5	19.0	5.4	7.2

Tolerance: d1: ± 0.20 ; s: ± 0.30 ; d、H: ± 0.50