




Cemented Carbide Turning Insert-Type 4G

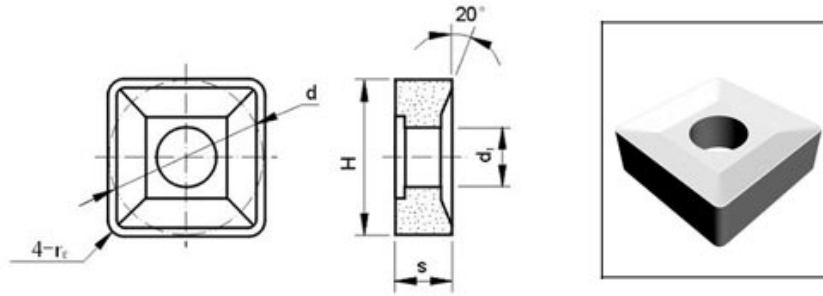

Unit: mm

Type	d	s	re	H	d1
CTC-G41310G	13.0	4.5	1.0	13.0	5.2
CTC-G41610G	16.0	5.5	1.0	16.0	6.2
CTC-G41915G	19.0	7.0	1.5	19.0	7.2

Tolerance: d1: ± 0.20 ; s: ± 0.30 ; d、H: ± 0.50