




Cemented Carbide Turning Insert-Type 4KA (B)

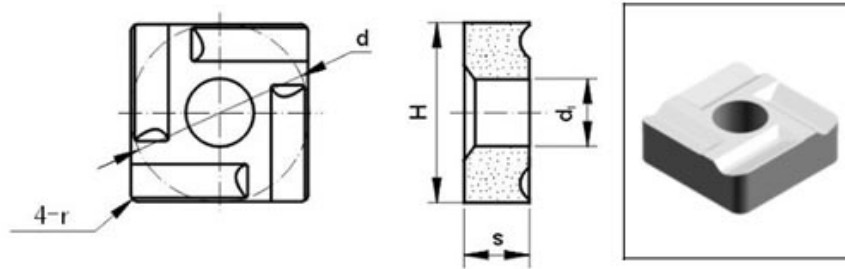

Unit: mm

Type	d	s	H	d1	r
CTC-G4K1615A4	16.0	5.5	16.0	6.2	1.5
CTC-G4K1910A4	19.0	7.0	19.0	7.2	1.0
CTC-G4K1920A4	19.0	7.0	19.0	7.2	2.0
CTC-G4K1615B4	16.0	5.5	16.0	6.2	1.5
CTC-G4K1910B4	19.0	7.0	19.0	7.2	1.0
CTC-G4K1920B4	19.0	7.0	19.0	7.2	2.0

Tolerance: d1: ± 0.20 ; s: ± 0.30 ; d、H: ± 0.50