




Cemented Carbide Rods with Two Helical Coolant Holes(40°)

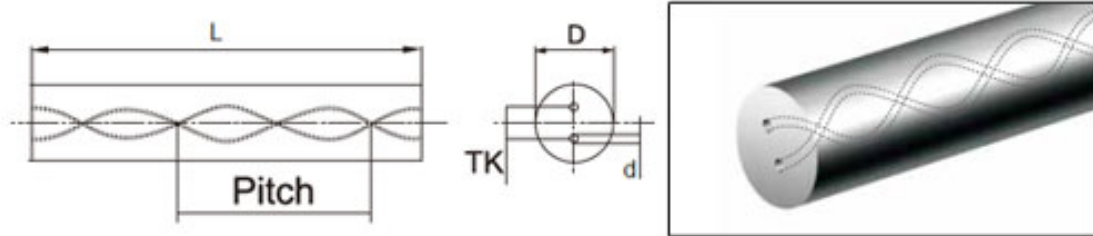

Unit: mm

Type	D	TK	d	L	Pitch
CTC-CΦ6.3×2Φ0.48×2.0×330	6.3	2.0	0.48	330	22.46
CTC-CΦ8.3×2Φ0.65×2.4×330	8.3	2.4	0.65	330	29.95
CTC-CΦ10.3×2Φ1.0×3.2×330	10.3	3.2	1.00	330	37.44
CTC-CΦ12.3×2Φ1.2×3.8×330	12.3	3.8	1.20	330	44.92
CTC-CΦ14.3×2Φ1.2×4.3×330	14.3	4.3	1.20	330	52.41
CTC-CΦ16.3×2Φ1.3×5.1×330	16.3	5.1	1.30	330	59.9
CTC-CΦ18.3×2Φ1.4×5.9×330	18.3	5.9	1.40	330	67.39
CTC-CΦ20.3×2Φ1.5×6.6×330	20.3	6.6	1.50	330	74.88
CTC-CΦ25.3×2Φ1.75×7.6×330	25.3	7.6	1.75	330	93.6

Tolerance: D: +0.4~+1.4; TK: 0.2~0.5; d: 0.15~0.25; L: +1.5